



# Mobile Scaffold Tower with Stabilizer

## NORMAL VERSION

Platform size

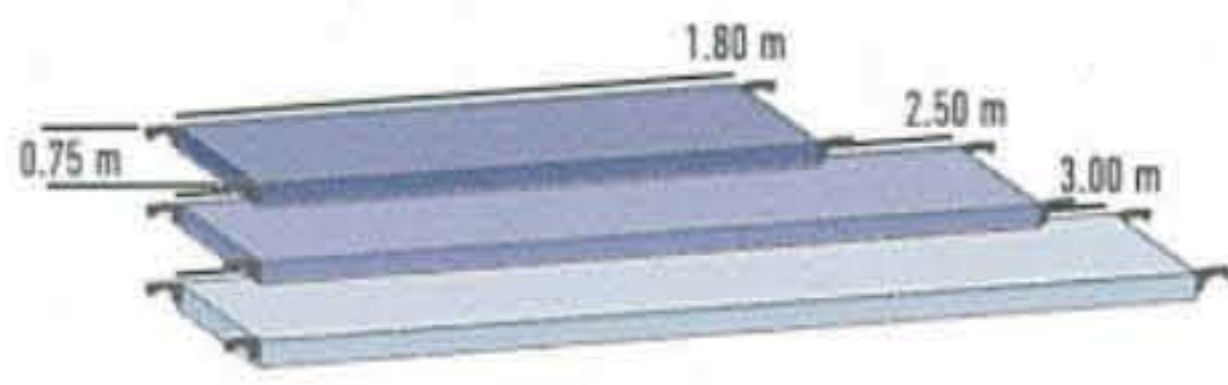

Working height

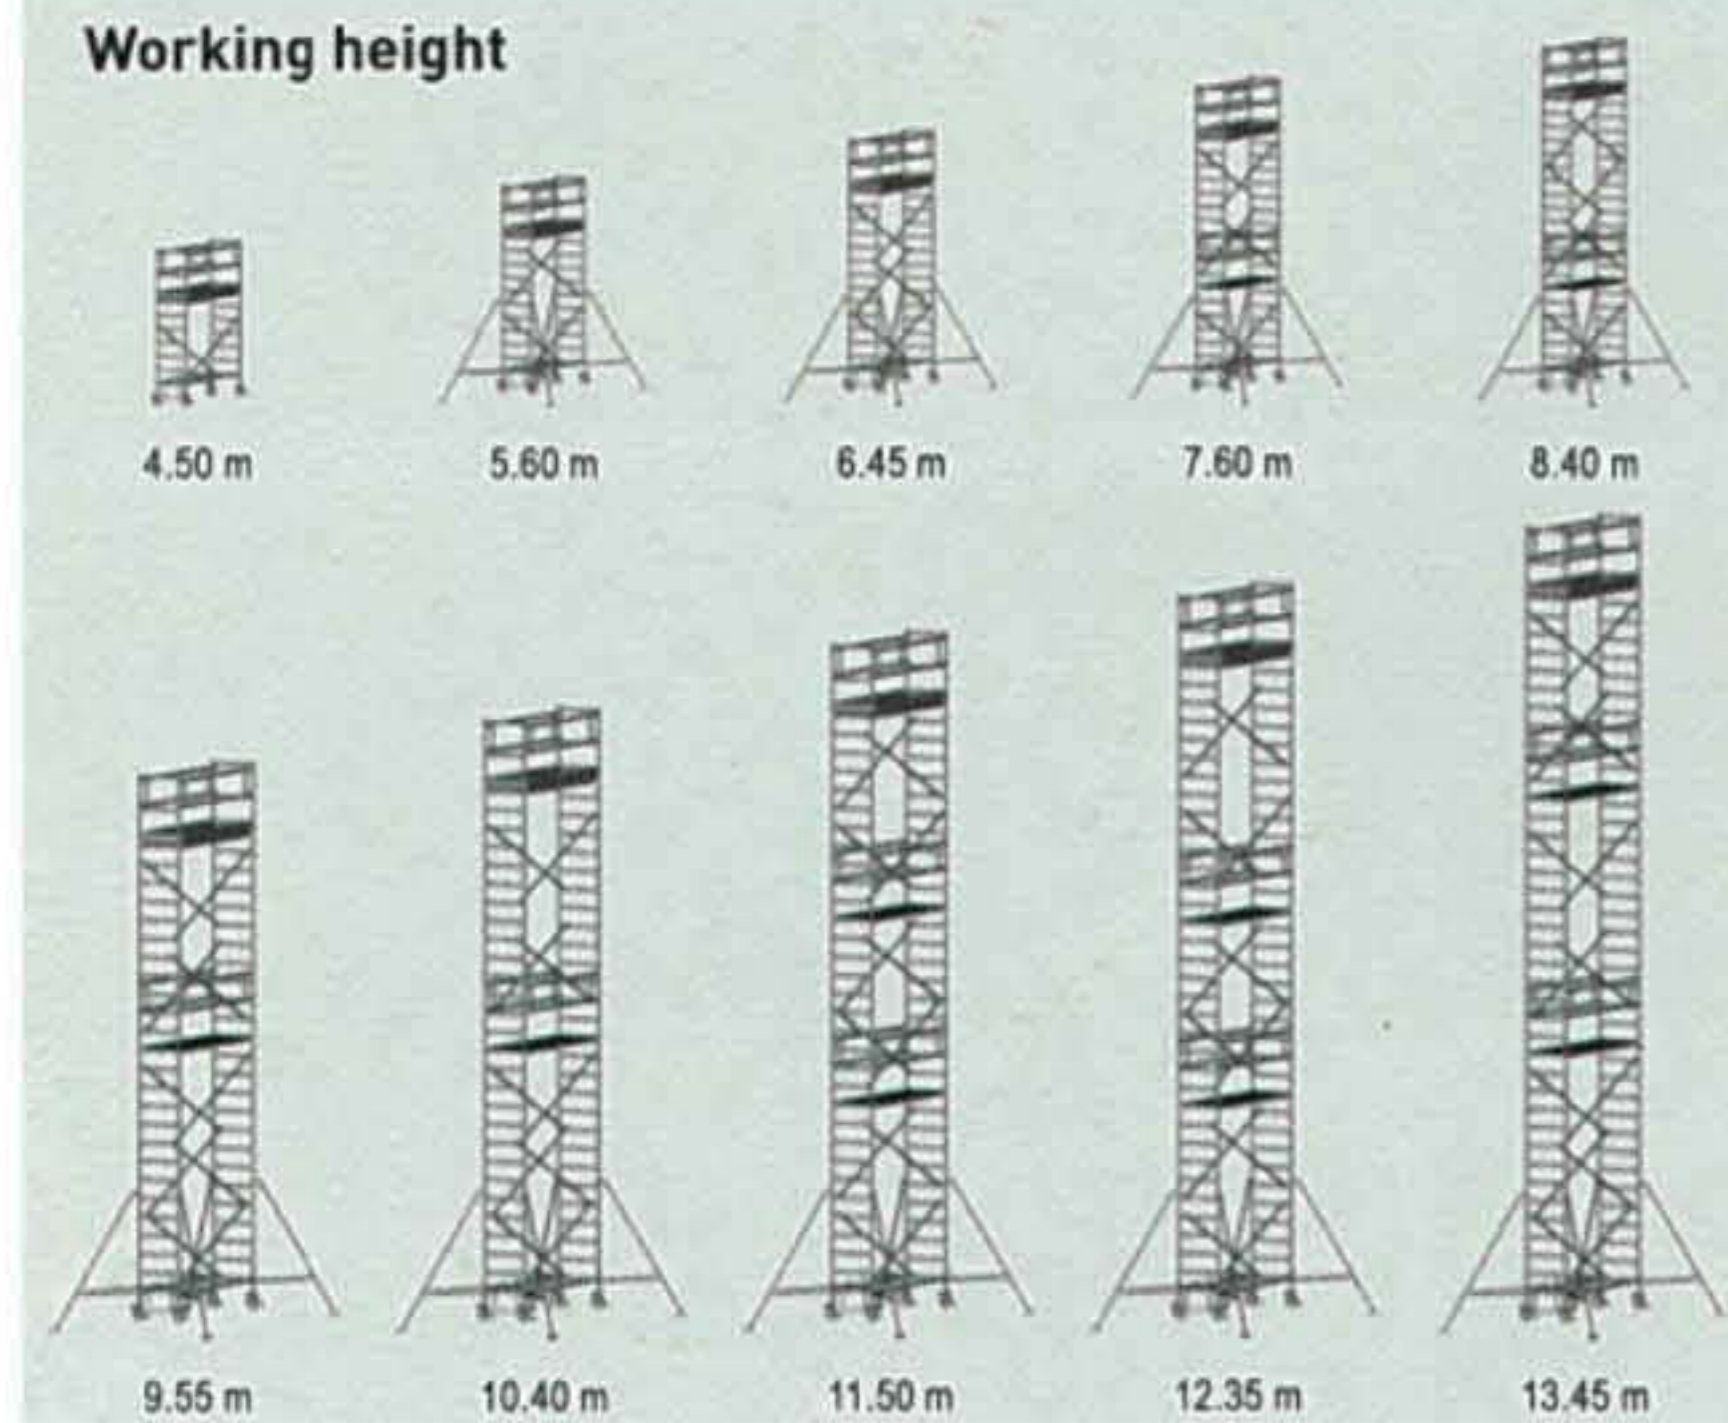

- Scaffolding width : 0.75 m; 1.35 m
- Scaffolding length : 1.80 m; 2.50 m; 3.00m
- Working heights can be extended form 4.50 m to max 13.45 m with standard parts
- 200kg / m<sup>2</sup> loading capacity i.e. depending on platform size from 270 kg to max. 810 kg
- The max platform heights are limited to 8 m outdoors and 12 m in fully enclosed spaces

Platform size 0.75 x 1.80 m											
Working height	approx.m	4.50	5.60	6.45	7.60	8.40	9.55	10.40	11.50	12.35	13.45
Overall height	m	3.50	4.60	5.45	6.60	7.40	8.55	9.40	10.50	11.35	12.45
Platform height	m	2.50	3.60	4.45	5.60	6.40	7.55	8.40	9.50	10.35	11.45
Weight	kg	92.4	135.5	145.9	177.5	187.9	208.7	214.0	250.7	256.0	269.2
Model No.		752023	752033	752043	752053	752063	752073	752083	752093	752003	752013
Counter wt. (Indoor)		24	0	0	0	0	4	4	12	24	36
Counter wt. (Outdoor)		24	0	0	0	0	28	☆	☆	☆	☆
Counter wt. (Ident. Nr.)					42912						

\*This model is not for outdoor use

Platform size 0.75 x 2.50 m											
Working height	approx.m	4.50	5.60	6.45	7.60	8.40	9.55	10.40	11.50	12.35	13.45
Overall height	m	3.50	4.60	5.45	6.60	7.40	8.55	9.40	10.50	11.35	12.45
Platform height	m	2.50	3.60	4.45	5.60	6.40	7.55	8.40	9.50	10.35	11.45
Weight	kg	103.1	147.0	158.3	196.6	207.9	230.6	235.8	280.2	285.5	299.5
Model No.		752123	752133	752143	752153	752163	752173	752183	752193	752103	752113
Counter wt. (Indoor)		24	0	0	0	0	0	4	8	20	32
Counter wt. (Outdoor)		24	0	0	4	20	☆	☆	☆	☆	☆
Counter wt. (Ident. Nr.)					42912						

\*This model is not for outdoor use

Platform size 0.75 x 3.00 m											
Working height	approx.m	4.50	5.60	6.45	7.60	8.40	9.55	10.40	11.50	12.35	13.45
Overall height	m	3.50	4.60	5.45	6.60	7.40	8.55	9.40	10.50	11.35	12.45
Platform height	m	2.50	3.60	4.45	5.60	6.40	7.55	8.40	9.50	10.35	11.45
Weight	kg	144.4	159.1	171.2	217.3	229.4	253.5	258.7	311.7	316.9	331.8
Model No.		752223	752233	752243	752253	752263	752273	752283	752293	752203	752213
Counter wt. (Indoor)		20	0	0	0	0	0	0	4	16	24
Counter wt. (Outdoor)		28	0	0	4	32	☆	☆	☆	☆	☆
Counter wt. (Ident. Nr.)					42912						

\*This model is not for outdoor use

